

Midi Wailer

General purpose fully automatic bird deterrent for small areas or roof tops



- Over 60 random combinations of pulsating high frequency audible or ultrasonic sounds which create an environment which the birds prefer to avoid.
- Connections for up to 4 optional slave units each fitted with 2 speakers
- Random blast time - 5 seconds to 1 minute
- Random interval - up to 15 minutes
- Volume control
- Optional versatile mounting plate for fixing to posts or acting as a tripod

scaringbirds.com

The Midi Wailer is designed as a low cost waterproof electronic bird deterrent for use over small acreages or from roof tops. It is competitively priced compared with gas bangers/guns but has the advantage of a more lasting deterrent effect with less human annoyance and negligible running costs.


The Midi Wailer comprises a compact battery or mains powered unit controlled by a light sensor (battery model only) with 4 speakers housed in a waterproof polymer box which emit a combination of audible or inaudible high frequency sounds and has waterproof jackplugs for the connection of optional slave units each of which is equipped with 2 speakers which can be spaced at intervals. These slave units extend the range and give additional directional focus whilst also adding confusion to the birds with sound emanating from different directions.

Which model? Battery or mains powered - Audible or ultrasonic? Please state your choice when ordering.

Recommended Combinations

Master unit alone: Ideal as a general purpose deterrent over small acreages or on roof tops.

Additional slave units: Around buildings and In intensive production situations such as aquaculture, viticulture, horticulture and soft fruits an area can be effectively cordoned off by a combination of direct sound from the master unit and focused sound from the slave units which also add confusion to the birds as a result of sound emanating from a number of

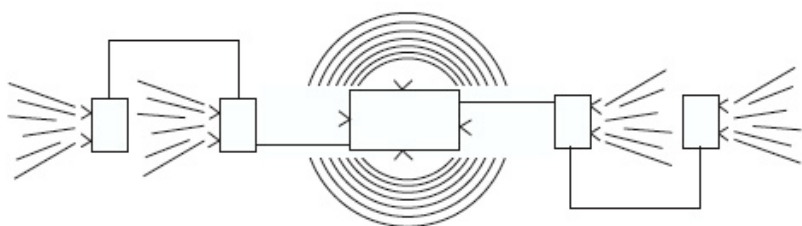

directions. In a general arable situation the slave units give valuable extra protection when directed towards peripheral trees/power lines where birds tend to perch before feeding. Slave units are available as end units with one socket, or intermediate units with two sockets.

Technical Specification

Power	12 volts/DC lead acid accumulator. 30 amp / hour minimum (small car battery) or 12volt/½ amp mains adaptor. Operating voltage 10 -15 volts.	Light sensor	External waterproof variable control.
Range	2.02 - 4.05 hectares.	Blast Cycle	Random up to 15 minutes.
Sound Frequency	4000 - 27000 Hz.	Blast Duration	Random 5 seconds to 1 minute.
Temperature	-30°C to +75°C.	Size	Master unit 240 X 180 X 150mm Slave unit 250 X 120 X 90mm
Volume control	External waterproof knob.	Weight	Master unit 1kg Slave unit 0.8kg
		Construction	Heat resistant polymer IP56 Slave Unit: Powder-coated die-cast aluminium.



Scaringbirds.com Ltd
Lower Upton
Little Hereford
Ludlow,
Shropshire SY8 4BB
UK

Tel: + 44 (0) 1584 711701
Fax: +44 (0) 1584 711478

info@scaringbirds.com
www.scaringbirds.com